


SCHMATIC

1. Material/Plated
  - 1.1 Housing:PPA, Black UL 94V-0.
  - 1.2 Terminal:Copper Alloy,Gold Plated
  - 1.3 Rubber Ring:Silica Gel
2. Electrical Performance
  - 2.1 Rated Voltage: 30V AC
  - 2.2 Rated Current: 1.0A
  - 2.3 Contact Resistance: 100mΩ Max.
  - 2.4 Insulation Resistance: 100MΩ Min.
  - 2.5 Dielectric Strength: 500V AC
3. Mechanical Performance
  - 3.1 Insertion Force: 3-30N
  - 3.2 Withdrawal Force: 3-30N
  - 3.3 Durability: 5000 Cycles
4. Operating Temperature: -25° C To +85° C
5. Dustproof and waterproof grade:IP67

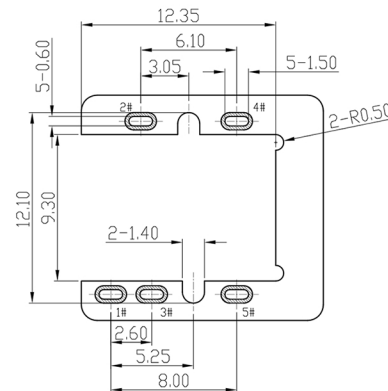

PCB LAYOUT

REV.	DESCRIPTION	ECN NO.	NAME	DATE
A	NEW RELEASE		Tom	2018-06-13
REVISIONS				

DRAWN	Tom	2018-06-13
CHECKED	Ango	2018-06-13
APPROVE	Kevin	2018-06-13
SCALE: N/A	SHEET: 1 OF 1	

DIMENSION TOLERANCE	
X	±0.35
X.X	±0.25
X.XX	±0.15
X.XXX	±0.10
GENERAL ANGLE: ±3°	
UNIT: mm	
LEVEL	P13

东莞市神久电子科技有限公司 Dongguan Shenjiu Electronic Technology Co., Ltd	
TITLE	3.5 PHONE JACK WATERPROOF
PART NO.	PJ-388X
DWG. NO.	